


# VOXPRIME

The Telephone Paging Specialists

## VOX-200

Wall Mount 70V Telephone  
Paging Amplifier with  
Night Ringer – 200W

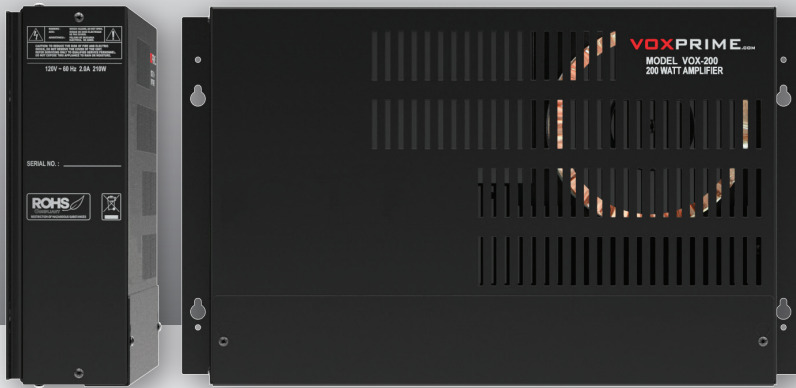

## DESCRIPTION

The VOX-200 is undeniably the most cost-effective telephone paging amplifier in its category.

It has all the required features for basic installations such as the night ringer. It is the perfect solution for low cost/high reliability installations.



## FEATURES

Built-In Night Ringer	Output fully short circuit protected
Music Input (RCA or Screw Terminal)	Thermal and electronic overload protection
200W RMS	Wall Mount & Rack Mount installation
70V Output	Heavy Duty Design
VOX with sensitivity level Control	Made in Canada
Volume, Bass & Treble level controls	5 Years Warranty
Separate level controls for Music & Telephone	UL/CSA Listed
Peak Level Indicator	

# SPECIFICATIONS

---

Power Output:	200 watt RMS
Distortion:	Less than 1%
Frequency Response:	$\pm 3$ dB, 100 $\approx$ 20,000Hz
Sensitivity:	TEL: 150mV; MUSIC: 100mV
Inputs:	TEL: 600 $\Omega$ balanced line, transformer-isolated
	MUSIC: 10k $\Omega$ unbalanced, Hi-Z source, RCA jacks or screw terminals
	MUSIC MUTE: Mutes music when shorted
	CONTACT RING: Triggers night ringer when shorted
	TEL RING: Triggers night ringer in response to 90V ring signal
Indicators & Controls:	POWER, PEAK LEVEL AND FAULT LED indicators. MUSIC VOLUME, MUSIC BASS,
	MUSIC TREBLE, TEL VOLUME, TEL BASS, TEL TREBLE, VOX, NIGHT RINGER
Outputs:	OUTPUT (70/25V RMS)
Overload Protection:	Thermal and electronic protection with a 4A, 120V $\sim$ slow blow fuse
Power Source:	120V AC, 60Hz
Power Consumption:	420 watts
Finish:	Black powder paint with silver and red lettering
Dimensions:	14- $\frac{1}{4}$ " W x 8- $\frac{3}{8}$ " H x 2- $\frac{3}{4}$ " D
Weight:	15 lbs
Environment:	Indoor

# OPTIONAL ACCESSORIES

---

VOX-RMK - Amplifier Rack Mount Kit - 5RU

© 2019 Voxprime, Inc.  
Specifications subject to change without notice.